

Blackmagicdesign PYXIS



BLK

	PYXIS 6K
Sensor	Large format (35.64 x 23.32mm)
Lens Mount	EF, PL or L
Lens Control	Iris and focus on supported lenses.
Dynamic Range	13 stops
Dual Native ISO	400 and 3200
Main Resolutions	6048 x 4032 (Open Gate 3:2) up to 36 fps 4832 x 4032 (Anamorphic 6:5) up to 36 fps 6048 x 3408 (6K 16:9) up to 46 fps 4096 x 2304 (4K 16:9) up to 60 fps 1920 x 1080 (1080 HD 16:9) up to 120 fps
Supported Codecs	Blackmagic RAW Constant Bitrate 3:1 (max 370MB/s) Blackmagic RAW Constant Bitrate 5:1 (max 223MB/s) Blackmagic RAW Constant Bitrate 8:1 (max 140MB/s) Blackmagic RAW Constant Quality Q0 (max 555MB/s) Blackmagic RAW Constant Quality Q1 (max 444MB/s) Blackmagic RAW Constant Quality Q3 (max 318MB/s) Blackmagic RAW Constant Quality Q5 (max 186MB/s) H.264 Proxy in 1920 x 1080, 8-bit 4:2:0 (max 12MB/s)
Screen	LCD Touchscreen 4" 1920 x 1080 1500nits
Connections	12G-SDI output up to 4K 60fps USB-C for Viewfinder USB-C for External Drive (SSD) or Zoom/Focus Demand BNC Reference IN or Timecode IN Mini XLR MIC input Jack 3.5mm MIC input Jack 3.5mm Headphone output Ethernet 1Gbps for Live Streaming or FTP transfer 2-pin Lemo DC input 11-19.5V BP-U type Battery slot 14.8V
Media	2x CF express Type B 1x External Drive recording (SSD) with USB-C connection
Includes	Free Davinci Resolve studio license




PYXIS Monitor EVF Kit



PYXIS Monitor Kit



PYXIS Monitor

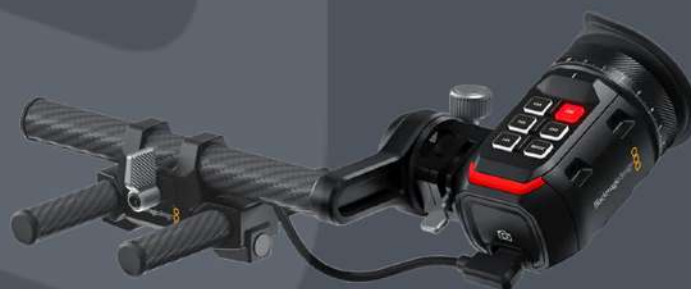

URSA Cine EVF



PYXIS Pro Handle



PYXIS Pro Grip



Zoom Demand



Focus Demand



PYXIS Rosette Plate



URSA Cine Handle



XLCS PYXIS Cage



MZ BPU-65 Battery