


VM-1110xI

1:10 Balanced Mono Audio Distribution Amplifier





The VM-1110xI is a highperformance distribution amplifier for balanced mono audio signals on XLR connectors. It can be configured 1:5 as a distribution amplifier for stereo balanced audio signals.

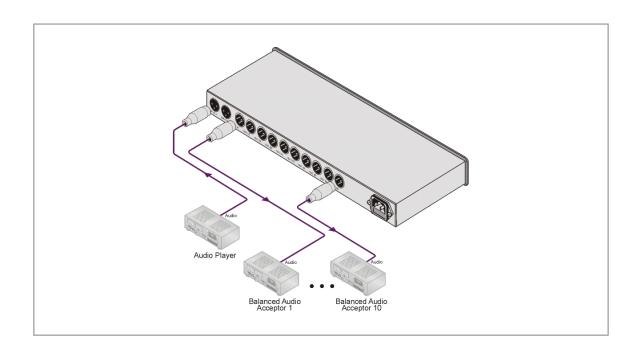



VM-1110xI

FEATURES

- Level (Gain) Controls.
- Dual Mode Configure as 1:10 (mono) or 1:5 (stereo) DA.
- S/N Ratio 89.3dB.
- Standard 19" Rack Mount Size 1U.

TECHNICAL SPECIFICATIONS

INPUT: 2 balanced audio $+4dBu/50k\Omega$

on XLR (F) connectors.

OUTPUT: 10 balanced audio

 $+4dBu/50\Omega$ on XLR (M)

connectors.

MAX. OUTPUT

LEVEL:

JT 23.8Vpp.

BANDWIDTH (- >100kHz.

3dB):

S/N RATIO: 89.3dB. CROSSTALK: -78dB.

CONTROLS: Level (x2): -0.7dB to +5.1dB,

mode selector switches.

COUPLING: AC (input); DC (output).

AUDIO THD +

0.081%.

NOISE:

AUDIO 2nd 0.006%.

HARMONIC:

POWER SOURCE: 230V AC, (115V AC U.S.A)

6VA.

DIMENSIONS: 19" x 7" x 1U W, D, H, rack

mountable.

WEIGHT: 2.6kg (5.7lbs) approx.

ACCESSORIES: Power cord.