


LVM-095W-N / SRM-095W



Main body Dimensions

- Main Body : 223 x 175 x 60 (mm) / 8.78 x 6.89 x 2.36 (inch)
- With stand : 260 x 194.2 x 90 (mm) / 10.24 x 7.65 x 3.54 (inch)
- Weight : 2.1Kg / 4.63lbs

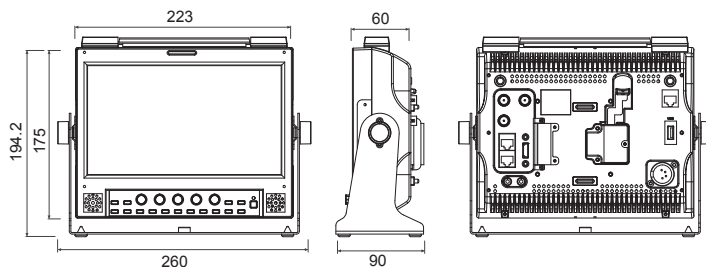

LCD


	LVM-095W-N	SRM-095W
Size	9"	9"
Resolution	1920 x 1080 (16 : 9)	1920 x 1080 (16 : 9)
Pixel Pitch	0.1035mm	0.1035mm
Color Depth	16.7M	16.7M
Viewing Angle (Typ.)	176°(H) / 176°(V)	176°(H) / 176°(V)
Luminance (Max.)	400cd/m ² (center) /	800cd/m ²
Contrast Ratio	750:1	800:1
Display Area	198(H) x 111(V) mm	198(H) x 111(V) mm

9" FHD Multi-purpose Monitor

The LVM-095W-N / SRM-095W, the new 9" released from TVLogic displays full HD resolution of 1920x1080. It also corresponds with a wide range of image sources (3G HD/ SD-SDI, HDMI) and provides a wide viewing angle (176 degrees).

For maximized efficiency and economic feasibility, LVM-095W-N / SRM-095W is constructed from aluminum for an extra-light body weight and holds a built-in V-Mount.

Upgraded with new FHD panel with accurate color reproduction capability that exactly meets the HDTV standards, LVM-095W-N / SRM-095W gives super clear picture quality with powerful features.

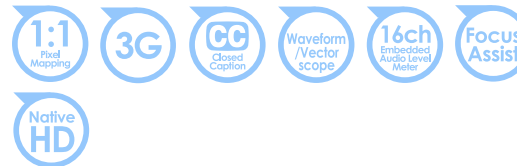

Product Highlights

- 9" 1920 x 1080 (16:9) Resolution
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- H/V Flip
- Key lock
- Luma(Y') Zone Check
- Marker
- Mono
- Range Error
- Temperature Adaptive Color
- Time Code Display
- UMD
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- Zoom
- CC-608 ANC
- CC-608 LINE 21
- CC-708

Input	
2 x BNC	SDI A/B Channel Input
1 x HDMI	HDMI 1 Input

Output	
1 x BNC	SDI A/B Selected Channel Output (HDMI-to-SDI)

Input Signal	
Analog	CVBS (SDI b port select)
3G-SDI	2.970Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI (PC & HDMI mode)	1080p (23.98/24/25/30/50/59.94/60)/1080i(50/59.94/60)/720p(50/60)/480i(60)/576p(50)/576p(50)/640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768

Analog Input Spec	
CVBS	1.0Vp-p (With Sync) NTSC. PAL

SDI Input Signal Formats	
SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i (60 / 59.94 / 50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) / Internal Speaker (Mixed Mono)
Power	DC 12/24V
Power Consumption (Approx.)	DC 24 Watts (Max 2A)
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / DC Power Adaptor / Camera Mount / Support / Handle / Stand

* Specifications may be changed without notice.

Optional Accessories

