Product Data Sheet

3G BNC CRIMP PLUG - IMAGE 360 SIZE

Application

12GHz capable, 75Ω BNC crimp connector with a nickel plate finish.

Product Data	
For Cables	1855A, Belden 1855ENH, Image 360
Body	Zinc Alloy, Nickel Plated
Coupling Nut	Zinc Alloy, Nickel Plated
Dielectric	Delrin
Ferrule	Brass, Nickel Plated
Pin	Brass, Gold Plated
Captive Pin	Yes

Product Data	
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	1500V RMS Max.
Durability	500 mating cycles
Impedance	75Ω
Max. Frequency	12GHz
Temprature	-55 to 85 decrees C
Working Voltage	500V RMS Max.

Product Codes	
	BH-65-0002

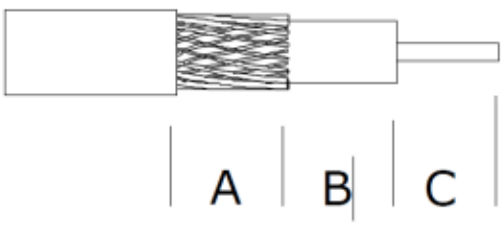

Tooling	
Crimp tool	WT-2 & WD-4
Stripper	black cassette

Crimp Dims

Pin: 1.07mm

Ferrule: 5.0mm

Strip Dimentions

A=8.5mm, B=2.5mm, C=4.0mm

Sales phone: +44 1844 202101
Sales email: Sales@argosycable.com
Support email:Technical@argosycable.com

www.argosycable.com

All information correct at time of writing.
Specifications subject to change without notice.
All trademarks referenced remain the property of there respective owners.